

We Illuminate The Globe



Passion with Perfection

MAKE IN INDIA



Eltech Lighting is one of the fastest growing company in India, having headquarters in Mumbai, Research & Development and manufacturing unit at Vasai.

With vast experience of 20 years & passion about lighting, we at Eltech create & deliver innovative products with an appreciable service in today's competitive market.

We have a well - founded and an extremely strong product portfolio & specialized wide range of Commercial, Residential, Architectural, Outdoor & Industrial Lighting, which meets a truly effective distribution network all over India & helps to set new branches with aggressive service & prompt delivery.

**Mission :**

Our mission is to provide innovative and environment friendly green energy products like LED & Induction, which saves energy and is less hazardous to the environment and country.

**Vision :**

Our Vision is to become the most popular as well as successful brand with our ethics & principle of performing business by delivering good quality products all over India and exporting it worldwide.





### HiPower LED Down Lights



Power (W)	Cutout Square	Cutout Round	Input Voltage
8 W	-	80 mm	95V - 240V
12 W	105 mm	105 mm	95V - 240V
18 W	140 mm	140 mm	95V - 240V
24 W	175 mm	175 mm	95V - 240V

#### Features

- High energy saving eco friendly
- Anti glare & uniform illumination
- Maintenance free long service life
- Smart luminaries for contemporary interiors
- Instant start
- Noiseless operation

#### Application

- Business Parks & Commercial Centres
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Education Centres, Residential Premises

### EcoPlus LED Down Lights

Power (W)	Shape	Cutout	Input Voltage
7 W	Round	75 mm	95V - 240V
12 W	Round	110 mm	95V - 240V
18 W	Round	140 mm	95V - 240V
24 W	Round	170 mm	95V - 240V

#### Features

- High energy saving eco friendly
- Anti glare & uniform illumination
- Maintenance free long service LIFE
- Smart luminaries for contemporary interiors
- Instant start
- Noiseless operation

#### Application

- Business Parks & Commercial Centres
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Education Centres, Residential Premises



#### Color Temperature

--	--	--	--	--	--	--	--	--	--

### Hilux LED Flat Panel



Power (W)	Shape	Cutout Square	Cutout Round	Input Voltage
4 W	Square / Round	70 mm	70 mm	95V - 240V
8 W	Square / Round	93 mm	93 mm	95V - 240V
12 W	Square / Round	130 mm	130 mm	95V - 240V
15 W	Square / Round	158 mm	162 mm	95V - 240V
22 W	Square / Round	196 mm	196 mm	95V - 240V
28 W	Square / Round	280 mm	280 mm	95V - 240V

#### Features

- High energy saving eco friendly
- Anti glare & uniform illumination
- Maintenance free long service life
- Smart luminaries for contemporary interiors
- Instant Start
- Noiseless operation

#### Application

- Residential Premises, Education Centres
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Business Parks



### Hilux COB Lights

Power (W)	Shape	Cutout	Input Voltage
1 W	Square / Round	30 mm	95V - 240V
3 W	Square / Round	58 mm	95V - 240V
6 W	Square / Round	68 mm	95V - 240V
10 W	Square / Round	85 mm	95V - 240V
15 W	Square / Round	100 mm	95V - 240V

#### Features

- High energy saving eco friendly
- Maintenance free long service life
- Smart luminaries for contemporary interiors
- Instant start
- Noiseless operation

#### Application

- Shopping Mall, Retail Outlets
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Business Parks

### Hilux LED Surface Panel

Power (W)	Shape	Outer Size Square	Outer Size Round	Input Voltage
4 W	Square / Round	80 mm	80 mm	95V - 240V
8 W	Square / Round	110 mm	110 mm	95V - 240V
12 W	Square / Round	150 mm	150 mm	95V - 240V
15 W	Square / Round	180 mm	180 mm	95V - 240V
22 W	Square / Round	220 mm	220 mm	95V - 240V
28 W	Square / Round	300 mm	300 mm	95V - 240V

#### Features

- High energy saving eco friendly
- Anti glare & uniform illumination
- Maintenance free long service life
- Smart luminaries for contemporary interiors
- Instant start
- Noiseless operation

#### Application

- Residential Premises, Education Centres
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Business Parks



### Hilux COB Lights

Power (W)	Shape	Cutout	Input Voltage
25 W	Round	145 mm	95V - 240V
35 W	Round	145 mm	95V - 240V
6 W	Round	MR 16	95V - 240V
10 W	Round	MR 16	95V - 240V

#### Features


- High energy saving eco friendly
- Uniform illumination
- Maintenance free long service life
- Smart luminaries for contemporary interiors
- Instant start
- Noiseless operation

#### Application

- Shopping Mall, Retail Outlets
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Residential Area



#### Color Temperature



#### Color Temperature





### Archline LED 2 x 2 Panel

Power (W)	Size	Cutout (W - L - D)	Input Voltage
45 W	2X2 Panel	570 X 570 X 70 mm	95V - 240V
25 W	1X2 Panel	270 X 570 X 70 mm	95V - 240V
20 W	1X1 Panel	270 X 270 X 70 mm	95V - 240V
50 W	1X4 Panel	270 X 1170 X 70 mm	95V - 240V
36 W	6"X4 Panel	145 X 1170 X 50 mm	95V - 240V
20 W	6"X2 Panel	145 X 570 X 50 mm	95V - 240V

### Soft light LED 2 x 2 Panel

36 W	2X2 Panel	570 X 570 X 70 mm	95V - 240V
------	-----------	-------------------	------------

#### Features

- High energy saving eco friendly
- Anti glare & uniform illumination
- Maintenance free long service life
- Smart luminaries for contemporary interiors
- Instant start
- Noiseless operation

#### Application

- Business Parks
- Commercial Centres
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Education Centres
- Residential Premises

Note : Also available in surface fitting on request.



### Archline LED - Light

Power (W)	Size	Type	Input Voltage
40 W	4ft	Suspended	90V - 240V
30 W	3ft	Suspended	90V - 240V
20 W	2ft	Suspended	90V - 240V



#### Color Temperature



### Neo LED Street Light

Power (W)	Input Voltage
15 W	85V - 265V
24 W	85V - 265V
36 W	85V - 265V
48 W	85V - 265V
70 W	85V - 265V
100 W	85V - 265V
150 W	85V - 265V

#### Features

- High energy saving eco friendly
- Anti glare & uniform illumination
- Maintenance free long service life
- Smart luminaries for contemporary exteriors
- Instant start
- Noiseless operation

#### Application

- Education Centres
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Business Parks



### Neo LED Flood Light

Power (W)	Input Voltage
30 W	85V - 265V
60 W	85V - 265V
80 W	85V - 265V
100 W	85V - 265V
150 W	85V - 265V

#### Features


- High energy saving eco friendly
- Corrosion construction
- Maintenance free long service life
- Smart luminaries for contemporary exteriors
- Instant start
- Noiseless operation

#### Application

- Garden areas
- Lawn areas
- Playing areas
- Parking areas
- Shopping mall exteriors



#### Color Temperature



### Eco LED Bulb



Power (W)	Base	Color
0.5 W	B 22	R, G, B, Y, W, O
3 W	B 22 / E 27	White & Yellow
5 W	B 22 / E 27	White & Yellow
7 W	B 22 / E 27	White & Yellow
9 W	B 22 / E 27	White & Yellow
12 W	B 22 / E 27	White & Yellow
15 W	B 22 / E 27	White & Yellow
18 W	B 22 / E 27	White & Yellow

#### Features

- High energy saving eco friendly
- Maintenance free long service life
- Smart luminaries for contemporary interiors
- Instant start
- Noiseless operation

#### Application

- Residential Premises
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Education Centres



### LED SMPS Drivers

Power (W)	Distance Coverage	Input Voltage
1 Amps	5050 1 meter	95V - 240V
2 Amps	5050 2 meter	95V - 240V
3 Amps	5050 3 meter	95V - 240V
5 Amps	5050 5 meter	95V - 240V
6.5 Amps	5050 6.5 meter	95V - 240V
8 Amps	5050 8 meter	95V - 240V
10 Amps	5050 10 meter	95V - 240V
12 Amps	5050 12 meter	95V - 240V
15 Amps	5050 15 meter	95V - 240V
20 Amps	5050 20 meter	95V - 240V

#### Features

- High energy saving eco friendly
- Maintenance free long service life
- Smart luminaries for contemporary interiors
- Instant start
- Noiseless operation

#### Application

- Commercial Centers
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Education Centers
- Residential Premises
- Used for strip light as curve lighting

### ELITE LED T5 & T8

Power (W)	Size	Input Voltage
T5 5 W	1 Feet	95V - 240V
T5 9 W	2 Feet	95V - 240V
T5 18 W	4 Feet	95V - 240V
T8 9 W	2 Feet	95V - 240V
T8 18 W	4 Feet	95V - 240V

#### Features

- High energy saving eco friendly
- Anti glare & uniform illumination
- Maintenance free long service life
- Smart luminaries for contemporary interiors
- Instant start
- Noiseless operation


#### Application

- Residential Premises, Education Centres
- Airports, Hospitals, Offices
- Resorts, Hotels, Restaurants
- Business Parks



### LED Driver

Power (W)	HPF	Input Voltage
4 W	0.5	95V - 240V
8 W	0.5	95V - 240V
12 W	0.9	95V - 240V
15 W	0.9	95V - 240V
18 W	0.95	95V - 240V
24 W	0.95	95V - 240V
50 W	0.95	85V - 265V
70 W	0.95	85V - 265V
100 W	0.95	85V - 265V
150 W	0.95	85V - 265V

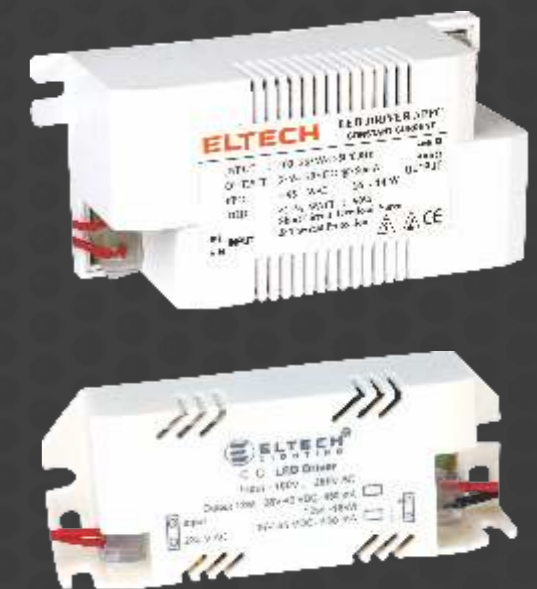

Note : Drivers are available for Automation, Dimming System & Sensor Lighting on request.

#### Color Temperature









**Eltech Lighting Pvt. Ltd.**

Vasai (E), Dist - Thane, Maharashtra, Pin - 401 202.

Email : [sales@eltech.com](mailto:sales@eltech.com) • Web : [www.eltechlighting.com](http://www.eltechlighting.com)

